


AGP™ 200

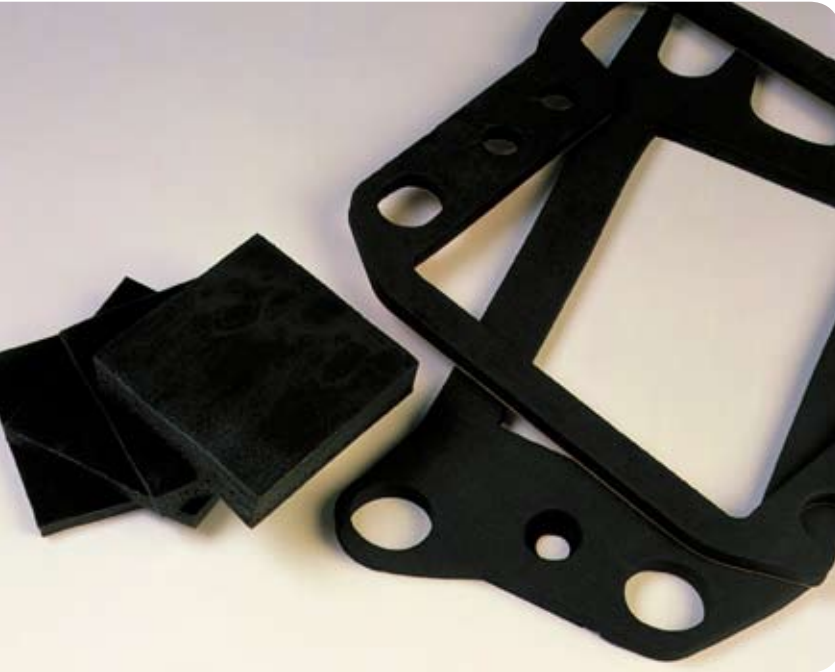

AGP™ 200 Foam

AGP™ 200 is a uniquely engineered polymer foam that provides outstanding performance characteristics previously unavailable in a single sealing product.

Its softness and conformability allows AGP™ 200 to recover larger tolerances during assembly, yet it avoids distortion of thin-wall plastics. AGP™ 200 attains an efficient water seal at only 30% compression and it will perform under extreme environmental and temperature conditions.

AGP™ 200 contains no plasticizers and will not craze sensitive materials or migrate to the paint surface causing a ghost mark. Moreover, it is odourless and halogen-free, making it an environmentally friendly product. Other key advantages of using AGP™ 200 foam are its superior physical properties : very low fogging, low flammability and thickness range.

Applications

- Automotive HVAC gasketing
- Automotive lighting gaskets
- Automotive wheatherstrip gap seal

Ecological, Water-Tight, Ultra-Soft Foam

Features & Benefits

- Very efficient water seal with only 30% compression
- Soft, conformable, easily compressible foam, compensates very high tolerances
- Outstanding fogging properties allow direct use in automotive HVAC and direct interior applications
- Wide temperature range allows automotive underhood applications
- Low energy surface adhesives with excellent aging capability
- Excellent weathering characteristics allow exterior applications
- No odour
- Lack of plasticizer allows direct contact with automotive paint and sensitive plastics such as ABS, PC, etc.
- Superior flame resistance complies with FMVSS302
- Skin on both sides

Product range

Thickness (mm) x Length (m) 3x65 - 4.5x45 - 6x35 - 8x25 - 10x20
 12x18 - 15x14 - 17x12 - 20x10

Thickness tolerance = +/- 15%

Colour : Black
 Configuration : Without adhesive (with liner)
 Log size : Usable width = 1000 mm
 Log diameter = +/- 0.50 m
 Core = 75mm
 Packaging : 4 logs / box
 1 box / pallet

Property	Test Method	Value or Rating		
		3mm	4.5 & 6mm	> 8mm
Force to compress @ 30% (kPa)	ASTM D-1667	11	9	7
Deflection @ 30% (kPa)	ASTM D-1667	7	5	4
Density (kg/m ³)	ISO 845	70	60	50
Elongation (%)	ASTM D-3574 Die A	100	100	125
Tensile strength (N/cm ²)	ASTM D-3574	10	8	8
Compression set (%)	ASTM D-1667	10		
Compression ratio for water seal (%)	-	30		
Fogging	SAE J1756 3 hrs @ 100°C / 21 °C	> 95% clarity		
	VW 50180	Pass		
Flammability (mm/min)	ISO 3795 / FMVSS 302	50		
Temperature range (°C)	-40 to +120			

Note : Parameter values are not guaranteed and will differ from lot to lot. For specification writing, contact the Application Engineering Department.

Distributed by:

Saint-Gobain Performance Plastics Chaineux S.A.

Avenue du Parc 18
 4650 Chaineux (Belgium)
 Phone: +32/87 32 20 11
 Fax: +32/87 32 20 51
 sgpl.chaineux@saint-gobain.com

AGP™ is a trademark.



The data and details in this leaflet were correct and up-to-date at the time of printing and are intended to provide information on our products and their possible applications. It is the user's responsibility to make sure he is in possession of the latest version of the product data sheet. This leaflet is not a specification and does not assure specific product characteristics or make reference to the suitability of the products for a definite application. Because Saint-Gobain cannot anticipate or control every application, we strongly recommend testing of this product under individual application conditions. The application, the use and the conversion of this product are under the user's responsibility.