


Korel® K60 Series

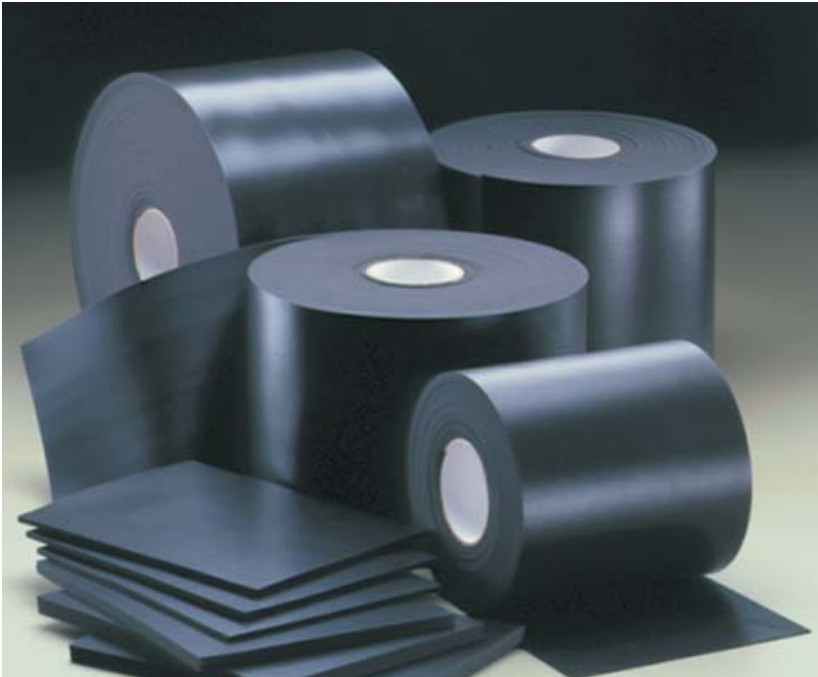

*Very firm deflection,
micro-cellular urethane
foam with excellent
gauge tolerance.*

Korel® K60 Series Micro-Cellular Polyurethane Foams

Korel® K60 series micro-cellular urethane foam is a specially formulated foam for use in applications requiring thin gauge and tight tolerances. High density and internal strength resists tearing and deformation in the most demanding uses while the unique cell structure provides excellent sealing.

Gasketing - Korel® has excellent resistance to compression set and high resiliency that ensures the seal will not break down over extended use, making it a preferred choice for gasketing applications.

Control of Unwanted Energy - The Korel® line of cushioning foam is ideal for controlling unwanted energy. These special formulations protect sensitive components by damping shock, dissipating motion, isolating vibration, and absorbing impact energy.

Non-standard products (optional - liners, adhesive or colour) can be produced by special order. Minimum and extended lead times may apply.

Other Korel® Foams

Saint-Gobain has developed a full ligne of Korel® micro-cellular foams. By varying the modulus and density, we have created a board product group that is categorized by degree of deflection force.

Note : Korel® K60 series is provided with paper liner. Options include polyester support film, and configurations with adhesive on one side.

Features / Benefits

- ▶ Resistant to moisture and most chemicals
- ▶ Conformable and flexible even in extreme environmental conditions
- ▶ Available cast onto polyester film for low deformation
- ▶ Available without adhesive, or with adhesive on one side

Typical Application

- ▶ Vibration Damping
- ▶ Cushioning
- ▶ Acoustical Control
- ▶ Cushioning
- ▶ Electronic Gasketing

Property	Test Method	Korel K60
Physical		
Density (kg/m ³)	ASTM D3574	640
Thickness (mm)		0.3
Standard colour		Black
Compression set (%)	ASTM D3574 Test D	
@ 23°C		< 3
@ 70°C		< 7
Compression Force Deflection (kPa)	ASTM D3574 Test C	
12.7 mm/min @ 25% Deflection		240
Force to Compress @ 25% (kPa)	ASTM D1667	550
Tear Strength (kN/m)	ASTM D624 Die C	6
Tensile Elongation (%)	ASTM D3574	300
Tensile Strength (kPa)	ASTM D3574	2000
Modulus (kPa)	ASTM D3574	1100
Thermal		
Temperature Resistance		
Recommended Constant Use, max.		70°C
Recommended Intermittent Use, max.		121°C
Thermal Conductivity (W/m-C)	ASTM E1530	0.086
Environmental		
Fogging	SAE-J 1756, 3 hrs @ 100°C	Pass
Outgassing	ASTM E595, 24 hrs @ 125°C	
TML %		0.78
CVCM %		0.19
WVR %		0.16
UL Testing (JMST2)	UL 50 and UL 508	File MH 26338
Electrical		
Surface Resistivity, ohm/sq	ASTM D257	2.3 x 10 ¹³
Volume Resistivity, ohm/cm	ASTM D257	1.3 x 10 ¹³
Dielectric Strength, volts/mil	ASTM D149	50

Please note : Because Saint-Gobain Performance Plastics cannot anticipate or control every potential application, we strongly recommend testing of this product under actual application conditions prior to commercial use.

Korel® is a registered trademark.

Distributor :

SAINT-GOBAIN Performance Plastics S.A.
Avenue du Parc 18
4650 CHAINEUX - BELGIUM
Tel. : +32(0)87.32.20.11
Fax : +32(0)87.32.20.51
E-mail : sgppl.chaineux@saint-gobain.com

The data and details in this leaflet were correct and up-to-date at the time of printing and are intended to provide information on our products and their possible applications. This leaflet is not a specification and does not assure specific product characteristics or make reference to the suitability of the products for a definite application. Because Saint-Gobain cannot anticipate or control every application, we strongly recommend testing of this product under individual application conditions.